

# Trio™ Q

Licensed UHF

Ethernet and Serial data radio

QH450 Hot Standby Full Duplex





Trio Q Data Radios are advanced, high-speed licensed digital data radios, providing both Ethernet and serial communications for complex and demanding applications in Point-to-Point and Point-to-Multipoint (Multiple Address Radio) Telemetry and remote SCADA systems.

Features such as ChannelShare+™ and web-based user configuration, together with powerful remote diagnostics and Network Management, make Trio Q Data Radios the complete licensed radio solution that works with leading host systems and remote equipment.

Combining both Ethernet and serial connectivity, Trio Q Data Radios are suitable for use with the latest SCADA technology as well as providing a smooth transition from serial-based infrastructure to IP/Ethernet.

Complimenting the QR450 half duplex remote radio, the QH450 full duplex radio kit is ideal for deployment at base & repeater sites in systems using two frequency operation. In high duty cycle applications, the QH450 delivers maximum rated transmitter power in ambient temperatures up to +70°C (158°F). Where 1+1 hot standby redundancy is not required, the full duplex QB450 radio is available.

# Product Data Sheet Trio QH450

## Specifications



### Trio QH450

#### Radio

Frequency Range	400-450MHz (L-Band) or 450-518MHz (H-Band)
Frequency Splits	Various Tx/Rx frequency splits - configurable
Channel Selection	3.125kHz channel steps
Channel Spacing	12.5 and 25kHz (software selectable)
Frequency Accuracy	±0.5ppm, -40 to +70°C (-40 to 158°F) ambient
Aging	<= 1ppm/annum
Radio Modes	Full duplex
Duplexer <sup>5</sup>	External duplexer filter may be required (not included) - Refer to note 5 for more information.

#### Transmitter

Tx Power	0.05 to 10W (+17 to +40dBm) +/- 0.1dB configurable with over-temperature and high VSWR protection
Modulation	Narrow band 2, 4, 8 and 16-level continuous phase modulation.
Tx Keyup Time	<1ms
Timeout Timer	Configurable 0 to 255 seconds
Tx Spurious	<= -37dBm
PTT Control	Auto (Data)

#### Receiver

AFC Tracking	Digital receiver frequency tracking
Mute	Configurable digital mute

#### Connections (for each QB within the Hot Standby configuration)

Serial Interface 1/2	1 x RS232 DB9 female connector providing 2 x RS-232 3-wire serial ports (shared connector). 300-38,400 bps asynchronous
Serial Interface Flow Control	Configurable hardware / 3-wire interface
Serial Interface DCD Control	Configurable DCD operation : activated on RF carrier or from user data output
Ethernet Port	3 x RJ45: 10/100 Mbps (auto-MDIX sensing) compliant with IEEE 802.3
Antenna <sup>5</sup>	2 x N female bulkhead (separate Tx and Rx ports - full duplex) – refer to diagram at end of datasheet for more details
Power	10-pin locking, mating connector (11-30 V DC)
LED Display	Multimode Indicators for DC Power, Transmit, Receive, Synchronised Data, Serial Interface 1 & 2 Transmit & Receive Data, Ethernet 1 & 2 Transmit & Receive Data

#### Ethernet

Supported Protocols	Ethernet (including UDP, TCP, DHCP, ARP, ICMP, STP, IGMP, SNMP & TFTP)
Ethernet Repeating	Automatic Peer to Peer repeating
Operating Modes	Layer-2 Ethernet Bridge mode / Layer-3 IP Router mode
Ethernet Traffic Filtering	Configurable: No Filtering / Unicast Traffic & ARP Only / Unicast Traffic Only / List of approved MAC addresses
Ethernet Link Monitoring	Monitor the Ethernet link between a QB and up to two remote IP addresses
Compression	Automatic data compression
Terminal Server	Legacy RS-232/RS-485 serial support via embedded terminal server (UDP/TCP)
IP Configuration	Auto (DHCP) and Manual
SNMP	SNMP V1,V2c, RFC 1213-compliant & radio diagnostics parameters (with notifications)
Modbus Gateway	Configurable MODBUS/TCP to MODBUS/RTU Gateway
Time Server	NTP Client / Server / Client-Server / Manual modes

#### Hot Standby

Change-over control	Manual (front panel switched) / automatic upon alarm / automatic upon timer / remote (software driven)
Alarm Monitoring	General Alarms / Transmitter / Receiver / Received Signal Strength / Received Data Errors / Ethernet Connectivity / Power Supply

Specifications continue on the next page

# Product Data Sheet Trio QH450

## Specifications

> Trio QH450																																			
<b>Modem</b>																																			
RF Channel Data Rate <sup>1</sup>	<table border="1"> <thead> <tr> <th>Regulatory Region</th> <th>Bandwidth (KHz)</th> <th>Speed (Kbps)</th> <th>RF 1x10<sup>-6</sup> BER Sensitivity (dBm)</th> </tr> </thead> <tbody> <tr> <td rowspan="4">FCC/IC</td> <td rowspan="4">12.5</td> <td>8</td> <td>-113</td> </tr> <tr> <td>16</td> <td>-110</td> </tr> <tr> <td>24</td> <td>-107</td> </tr> <tr> <td>32</td> <td>-100</td> </tr> <tr> <td rowspan="8">ACMA/ETSI</td> <td rowspan="4">12.5</td> <td>8</td> <td>-113</td> </tr> <tr> <td>16</td> <td>-110</td> </tr> <tr> <td>24</td> <td>-107</td> </tr> <tr> <td>32</td> <td>-100</td> </tr> <tr> <td rowspan="4">25</td> <td rowspan="4">25</td> <td>14</td> <td>-111</td> </tr> <tr> <td>28</td> <td>-109</td> </tr> <tr> <td>42</td> <td>-106</td> </tr> <tr> <td>56</td> <td>-99</td> </tr> </tbody> </table>	Regulatory Region	Bandwidth (KHz)	Speed (Kbps)	RF 1x10 <sup>-6</sup> BER Sensitivity (dBm)	FCC/IC	12.5	8	-113	16	-110	24	-107	32	-100	ACMA/ETSI	12.5	8	-113	16	-110	24	-107	32	-100	25	25	14	-111	28	-109	42	-106	56	-99
Regulatory Region	Bandwidth (KHz)	Speed (Kbps)	RF 1x10 <sup>-6</sup> BER Sensitivity (dBm)																																
FCC/IC	12.5	8	-113																																
		16	-110																																
		24	-107																																
		32	-100																																
ACMA/ETSI	12.5	8	-113																																
		16	-110																																
		24	-107																																
		32	-100																																
	25	25	14	-111																															
			28	-109																															
			42	-106																															
			56	-99																															
Dynamic Speed Selection	QoS/RSSI based Automatic Speed Selection or Fixed speed mode																																		
Operating Modes	Base, remote, repeater or store 'n' forward																																		
Channelshare+™	Advanced dynamic supervisory collision avoidance system																																		
Backward Compatibility <sup>2</sup>	Backward compatible with Trio E-Series radios																																		
Firmware	Local and over-the-air flash-based firmware upgradable patches with support for broadcast updates																																		
<b>Security</b>																																			
Encryption <sup>3</sup>	256-bit AES																																		
HTML Interface	Password Protected HTTP and HTTPS configuration and management interface																																		
Console Interface	Password protected Telnet, SSH and Serial console interface																																		
Password Protection	Password protected configuration sessions																																		
<b>Diagnostics</b>																																			
Diagnostics Overview	<ul style="list-style-type: none"> <li>• Network management and diagnostic Windows GUI software</li> <li>• Network-wide operation from any remote terminal</li> <li>• Non intrusive protocol – runs simultaneously with the application</li> <li>• Storage of data error and channel occupancy statistics</li> <li>• Embedded Error Rate testing capabilities</li> <li>• Diagnostics parameters available               <ul style="list-style-type: none"> <li>• Transmitter Power</li> <li>• Received Signal Strength</li> <li>• DC Supply Voltage</li> <li>• Received Frequency Offset</li> <li>• Radio Temperature</li> <li>• VSWR</li> </ul> </li> </ul>																																		
Logging	Embedded event and performance logs including time stamped data statistics and channel occupancy																																		
Diagnostics & Configuration	Configuration via embedded HTTP, HTTPS web interface & or Telnet/SSH/Serial console																																		
Ping Tester	Embedded ping test facility																																		
<b>General</b>																																			
Operating Temperature Range	-40 to +70°C (-40 to 158°F) ambient																																		
Cooling	Built in temperature controlled fan																																		
Input Voltage	11-30V DC																																		
Input Power (Tx Typical)	76 W @ 30dBm, 92 W @ 37dBm, 106 W @ 40dBm																																		
Input Power (Rx Typical)	35W																																		
Protection mode	Automatic or manual changeover between QB450 units																																		
Housing & Dimensions	Hot Standby is configured using 2 x QB450 + 1 x Hot Standby Controller (19" 1 RU each) for a total of 19"(483mm) 3 RU rack mount. Without mounting brackets, D:424 x H:133.3 x W:436.5mm (D:16.7" x H:5.25" x W:17.18")																																		
Weight	15kg (33lbs) excluding optional duplexer																																		
Warranty	3 years on parts and labor																																		
<b>Approvals and Certifications</b>																																			
Europe (ETSI)	ETSI EN 300 113, EN 301 489, EN 60950																																		
United States (FCC)	FCC PART 15, PART 90																																		
Canada (IC)	IC RS119, ICES-001																																		
Australia (ACMA)	ACMA AS4295-1995 (Data)																																		

## Product Data Sheet Trio QH450

### Model Code

TBURQH4HN-E00E1L0A represents a typical part number

<b>Model</b>	<b>Trio Radio QH450</b>
TBURQ	Q Data Radios
<b>Code</b>	<b>Select: Unit Type</b>
H	Full Duplex Hot Standby Kit (with controller) - 19" 3RU Comprised of 2 x QB450 + 1 x QH Hot Standby Controller
<b>Code</b>	<b>Select: Generic Frequency Band</b>
4	UHF: 400 - 518 MHz Band
<b>Code</b>	<b>Select: Sub Band - UHF</b>
L	Low Band : 400 to 450MHz
H	High Band : 450 to 518MHz
<b>Code</b>	<b>Select: Reserved for future use</b>
N	Reserved for future use
<b>Code</b>	<b>Select: Regulatory Region<sup>1</sup></b>
E00	ETSI/ACMA Region
F00	FCC Region
<b>Code</b>	<b>Select: Encryption<sup>3</sup></b>
E	256-bit AES encryption (standard)
N	No encryption
<b>Code</b>	<b>Select: Licensed Feature</b>
1L	Ethernet & Serial (Two Ethernet & two Serial Ports)
<b>Code</b>	<b>Select: Power Supply</b>
0	11-30V DC
<b>Code</b>	<b>Select: Hot Standby Controller Options</b>
A	Common Tx/Rx Ports (External Duplexer required)
B	Duplicated Tx/Rx Antennas

**Example: TBURQH4LN-E00E1L0A** specifies: Trio QH450 Hot Standby full duplex radio kit, 400 to 450MHz, modulation for ETSI/ACMA regions, 256 bit Encryption enabled, three Ethernet & two Serial Ports, 10-30V DC power supply, Common Tx/Rx Ports.

#### Radio Regulatory Standards:

FCC – Federal Communications Commission

IC – Industry Canada

ETSI – European Telecommunication Standards Institute

ACMA – Australian Communications and Media Authority

**Note 1:** Availability of radio models is dependent on country of deployment. Local and regulatory conditions may determine the performance and suitability of the radio in different countries. It is the responsibility of the buyer to ensure the radio model meets the regulatory conditions required. Contact your local Schneider Electric sales office for more details.

**Note 3:** Export and import restrictions may apply.

**Note 4:** Other country and radio regulatory regional approvals are available upon request. Contact your local Schneider Electric sales office for more details.


**Note 5:** The QH450 is a full duplex radio and must be deployed with suitable isolation between transmitter and receiver. Isolation may be achieved by the use of band pass duplexer, external filters or suitably spaced separate antennas. Internal duplexers and filters are not available. Suitable duplexers include TBURDUPLB4XXCOA. For information regarding duplexers, contact your local sales office.

**Disclaimer:** Not all product features are available in every mode of operation. Schneider Electric reserves the right to change product specifications. For more information visit [www.schneider-electric.com](http://www.schneider-electric.com).

# Product Data Sheet Trio QH450

## Dimensions and Options

### QH450 - Hot Standby Full Duplex Radio - Dimensions

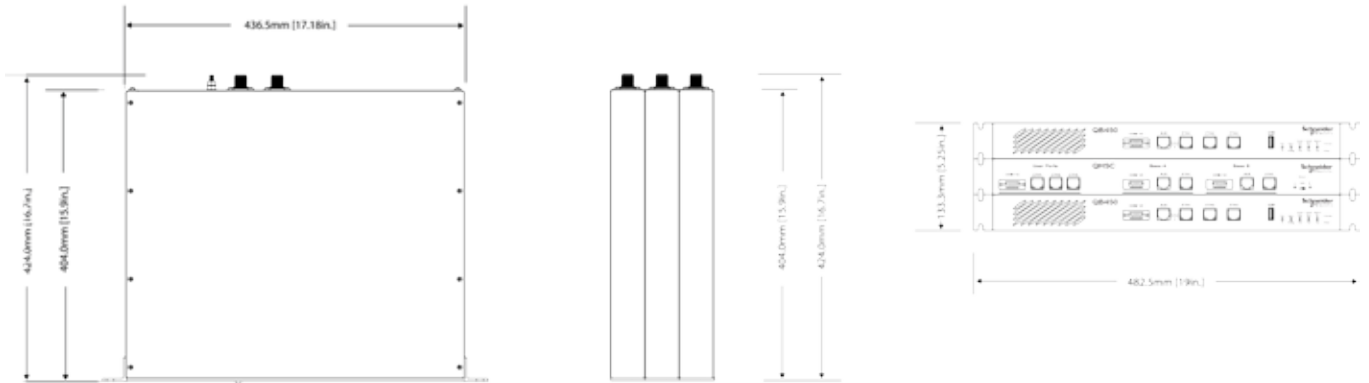


### QH450 - Hot Standby Controller Kit Configurations

#### Kit Configuration

- TBURQH4xx-xxxxxxx**A**
- 2 x TBURQB4xx-xxxxxxx
- 1 x TBURQHSC-00**A**

- TBURQH4xx-xxxxxxx**B**
- 2 x TBURQB4xx-xxxxxxx
- 1 x TBURQHSC-00**B**

QHSC Hot Standby Controller Option

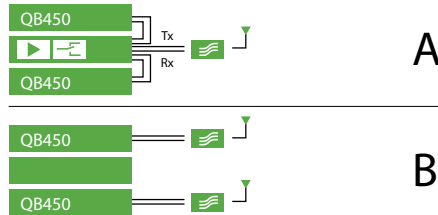

#### QHSC - Option Descriptions

	Description	Antenna Type
<b>A</b>	LNA (Rx) & RF Relay (Tx) Fitted	Common Tx/Rx Antenna
<b>B</b>	Duplicated Tx/Rx Ports	Duplicated Tx/Rx Antennas

Note – The QH450 is a full duplex radio platform and must be deployed with suitable band pass duplexer or external filters. Internal Duplexers are not available. Suitable duplexers include TBURDUPLXBP4XXCOA. For information regarding external duplexers, contact your local sales office.

LNA (Low Noise Receiver Amplifier / Splitter)

RELAY (Coaxial Transmitter Switch)

EXTERNAL DUPLEXER