

# Trio™ Q

Licensed UHF

Ethernet and Serial data radio

QP450 – Hot Standby Half Duplex





Trio Q Data Radios are advanced, high-speed licensed digital data radios, providing both Ethernet and serial communications for complex and demanding applications in Point-to-Point and Point-to-Multipoint (Multiple Address Radio) Telemetry and remote SCADA systems.

Features such as ChannelShare+™ and web-based user configuration, together with powerful remote diagnostics and Network Management, make Trio Q Data Radios the complete licensed radio solution that works with leading host systems and remote equipment.

Combining both Ethernet and serial connectivity, Trio Q Data Radios are suitable for use with the latest SCADA technology as well as providing a smooth transition from serial-based infrastructure to IP/Ethernet.

Complimenting the QR450 half duplex remote radio, the QP450 half duplex radio is ideal for deployment at base & repeater sites in systems using single frequency (simplex) operation. In high duty cycle applications, the QP450 delivers maximum rated transmitter power in ambient temperatures up to +70°C (158°F).

# Product Data Sheet Trio QP450

## Specifications

Trio QP450	
<b>Radio</b>	
Frequency Range	400-450MHz (L-Band) or 450-518MHz (H-Band)
Frequency Splits	Various Tx/Rx frequency splits - configurable
Channel Selection	3.125kHz channel steps
Channel Spacing	12.5 and 25kHz (software selectable)
Frequency Accuracy	±0.5ppm, -40 to +70°C (-40 to 158°F) ambient
Aging	<= 1ppm/annum
Radio Modes	Simplex or Half duplex
<b>Transmitter</b>	
Tx Power	0.05 to 10W (+17 to +40dBm) +/- 0.1dB configurable with over-temperature and high VSWR protection
Modulation	Narrow band 2, 4, 8 and 16-level continuous phase modulation
Tx Keyup Time	<1ms
Timeout Timer	Configurable 0 to 255 seconds
Tx Spurious	<= -37dBm
PTT Control	Auto (Data)
<b>Receiver</b>	
AFC Tracking	Digital receiver frequency tracking
Mute	Configurable digital mute
<b>Connections</b>	
Serial Interface 1/2	1 x DB9 female connector providing 2 x RS-232 3-wire serial ports or 1x RS485 serial port (shared connector).
Serial Interface Speeds	From 600bps up to 115,200bps
Serial Interface Flow Control	Configurable hardware / 3-wire interface
Serial Interface DCD Control	Configurable DCD operation : activated on RF carrier or from user data output
Ethernet Port	3 x RJ45: 10/100 Mbps (auto-MDIX sensing) compliant with IEEE 802.3
Antenna	Refer to diagram at end of datasheet for detailed information - 2 x N female bulkhead (Refer Option B) - 1 x N female bulkhead (Refer Option E)
Power	10-pin locking, mating connector (11-30 V DC)
LED Display	Multimode Indicators for DC Power, Transmit, Receive, Synchronised Data, Serial Interface 1 & 2 Transmit & Receive Data, Ethernet 1 & 2 Transmit & Receive Data
<b>Ethernet</b>	
Supported Protocols	Ethernet (including UDP, TCP, DHCP, ARP, ICMP, STP, IGMP, SNMP & TFTP)
Ethernet Repeating	Automatic Peer to Peer repeating
Operating Modes	Layer-2 Ethernet Bridge mode / Layer-3 IP Router mode
Ethernet Traffic Filtering	Configurable: No Filtering / Unicast Traffic & ARP Only / Unicast Traffic Only / List of approved MAC addresses
Compression	Automatic data compression
Terminal Server	Legacy RS-232/RS-485 serial support via embedded terminal server (UDP/TCP)
IP Configuration	Auto (DHCP) and Manual
SNMP	SNMP V1,V2c, RFC 1213-compliant & radio diagnostics parameters (with notifications)
Modbus Gateway	Configurable MODBUS/TCP to MODBUS/RTU Gateway
Time Server	NTP Client / Server / Client-Server / Manual modes

Specifications continue on the next page

# Product Data Sheet Trio QP450

## Specifications



### Trio QP450

#### Modem

RF Channel Data Rate <sup>1</sup>	Regulatory Region	Bandwidth (KHz)	Speed (Kbps)	RF 1x10 <sup>-6</sup> BER Sensitivity (dBm)	
	FCC/IC	12.5	8	-113	
			16	-110	
			24	-107	
			32	-100	
	ACMA/ETSI	12.5	12.5	8	-113
				16	-110
24				-107	
32				-100	
25		25	14	-111	
			28	-109	
42	-106				
56	-99				
Dynamic Speed Selection	QoS/RSSI based Automatic Speed Selection or Fixed speed mode				
Operating Modes	Base, remote, repeater or store 'n' forward				
Collision Avoidance	Channelshare+™ - Advanced dynamic supervisory collision avoidance system Carrier Sense - Carrier sense based collision avoidance system				
Backward Compatibility <sup>2</sup>	Backward compatible with Trio E-Series radios				
Firmware	Local and over-the-air flash-based firmware upgradable patches with support for broadcast updates				

#### Security

Encryption <sup>3</sup>	256-bit AES
HTML Interface	Password Protected HTTP and HTTPS configuration and management interface
Console Interface	Password protected Telnet, SSH and Serial console interface
Password Protection	Password protected configuration sessions

#### Hot Standby

Change-over control	Manual (front panel switch) / automatic upon alarm / automatic upon timer / remote (software driven)
Alarm Monitoring	Transmitter / General Alarms / Power Supply

#### Diagnostics

Diagnostics Overview	<ul style="list-style-type: none"> <li>• Network management and diagnostic Windows GUI software</li> <li>• Network-wide operation from any remote terminal</li> <li>• Non intrusive protocol – runs simultaneously with the application</li> <li>• Storage of data error and channel occupancy statistics</li> <li>• Embedded Error Rate testing capabilities</li> <li>• Diagnostics parameters available               <ul style="list-style-type: none"> <li>• Transmitter Power</li> <li>• Received Signal Strength</li> <li>• DC Supply Voltage</li> <li>• Received Frequency Offset</li> <li>• Radio Temperature</li> <li>• VSWR</li> </ul> </li> </ul>
Logging	Embedded event and performance logs including time stamped data statistics and channel occupancy
Diagnostics & Configuration	Configuration via embedded HTTP, HTTPS web interface & or Telnet/SSH/Serial console
Ping Tester	Embedded ping test facility

Specifications continue on the next page

# Product Data Sheet Trio QP450

## Specifications



### Trio QP450

#### General

Operating Temperature Range	-40 to +70°C (-40 to 158°F) ambient
Cooling	Built in temperature controlled fan
Input Voltage	11-30V DC
Input Power (Tx typical)	55 W @ 30dBm, 71 W @ 37dBm, 85 W @ 40dBm
Input Power (Rx typical)	14W
Housing & Dimensions	19" (483mm) 1 RU rack mount. Without mounting brackets, D:424 x H:44.45 x W:436.5mm (D:16.7" x H:1.75" x W:17.18")
Weight	5kg (11lbs.)
Warranty	3 years on parts and labor

#### Approvals and Certifications

Europe (ETSI)	ETSI EN 300 113, EN 301 489, EN 60950
United States (FCC)	FCC PART 15, PART 90
Canada (IC)	IC RS119, ICES-001
Australia (ACMA)	ACMA AS4295-1995 (Data)

## Product Data Sheet Trio QP450 Model Code

TBURQP4HN-E00E1L0B represents a typical part number

<b>Model</b>	<b>Trio Radio QB450</b>
TBURQ	Q Data Radios
<b>Code</b>	<b>Select: Unit Type</b>
P	Half Duplex Hot Standby Radio - 19" 1RU
<b>Code</b>	<b>Select: Generic Frequency Band</b>
4	UHF: 400 - 518 MHz Band
<b>Code</b>	<b>Select: Sub Band - UHF</b>
L	Low Band : 400 to 450MHz
H	High Band : 450 to 518MHz
<b>Code</b>	<b>Select: Reserved for future use</b>
N	Reserved for future use
<b>Code</b>	<b>Select: Regulatory Region<sup>1</sup></b>
E00	ETSI/ACMA Region
F00	FCC Region
<b>Code</b>	<b>Select: Encryption<sup>3</sup></b>
E	256-bit AES encryption (standard)
N	No encryption
<b>Code</b>	<b>Select: Licensed Feature</b>
1L	Ethernet & Serial (Two Ethernet & two Serial Ports)
<b>Code</b>	<b>Select: Power Supply</b>
0	10 - 30V DC
<b>Code</b>	<b>Select: Hot Standby Options</b>
B	Duplicated Tx/Rx Ports
E	Common switched Tx/Rx Port

**Example: TBURQP4LN-E00E1L0B** specifies: Trio QP450 Hot Standby half duplex radio, 400 to 450MHz, ETSI/ACMA Regulatory Region, 256 bit Encryption enabled three Ethernet & two Serial Ports, 11-30V DC power supply, Duplicated Tx/Rx Ports.

#### Radio Regulatory Standards:

FCC – Federal Communications Commission

IC – Industry Canada

ETSI – European Telecommunication Standards Institute

ACMA – Australian Communications and Media Authority

**Note 1:** Availability of radio models is dependent on country of deployment. Local and regulatory conditions may determine the performance and suitability of the radio in different countries. It is the responsibility of the buyer to ensure the radio model meets the regulatory conditions required. Contact your local Schneider Electric sales office for more details.

**Note 2:** Backward compatibility is not available for all types & models of Trio E radio. Not all features are available when operating in backward compatible mode. Contact your local Schneider Electric sales office for more details.


**Note 3:** Export and import restrictions may apply.

**Note 4:** Other country and radio regulatory regional approvals are available upon request. Contact your local Schneider Electric sales office for more details.

**Disclaimer:** Not all product features are available in every mode of operation. Schneider Electric reserves the right to change product specifications. For more information visit [www.schneider-electric.com](http://www.schneider-electric.com).

# Product Data Sheet Trio QP450 Dimensions and Options

## QP450 - Hot Standby Half Duplex Radio - Dimensions

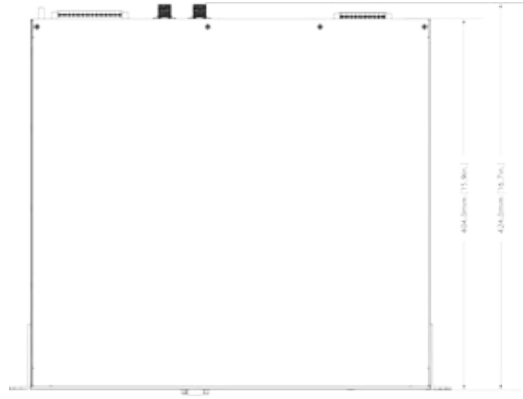

## QP450 - Hot Standby Half Duplex Options


### Hot Standby Options



**B**



**E**

 RELAY (Coaxial Transmitter Switch)

### QP450 Hot Standby Option Descriptions

	Description	Antenna Type
<b>B</b>	Duplicated Tx/Rx Ports	Duplicated Tx/Rx Antennas
<b>E</b>	Common Switched Tx/Rx Port	Common Tx/Rx Antenna